

# Graffiti Barrier

Product # 333

## Sacrificial Graffiti-Protection Barrier

Graffiti Barrier is a clear, odorless liquid that can be applied to nearly any non-porous surface to provide a protective barrier against graffiti. After it's applied, it dries to a clear film, which protects against spray paint, marker, pen and other substances. Once defaced, the barrier is easily removed with no damage to the surface. The thickened formula adheres to vertical surfaces, and is water-resistant, allowing for some outdoor applications. It will not affect signs' reflective properties, and will not yellow.

### Use on:

- Signs
- Soda machines
- Enamel
- Lockers
- Doors
- Powder coated surfaces
- Restroom partitions
- Walls
- Electroplate
- Windows and mirrors
- Surfaces that cannot be repainted
- Plastic

Note: Not for use on wood, painted and other porous surfaces.

### Protects against:

- Spray paint
- Marker
- Pen

### Features and Benefits

- Creates a crystal-clear barrier to protect surfaces from graffiti
- Paintable liquid formula can be applied to most any non-porous surface
- Ideal for signs, partitions, walls, and surfaces that cannot be repainted
- Water-resistant formula
- Peelable and rinsable for easy removal

### Properties

|                   |              |
|-------------------|--------------|
| Appearance.....   | White Liquid |
| Fragrance.....    | Mild         |
| Ready to Use..... | Yes          |
| pH.....           | 7.0-8.0      |
| VOC content.....  | <1.0% by wt. |

### Directions

Complete directions on product label

Mix well before using. Using a roller or paint brush, apply a thin layer onto a clean, non-porous surface and allow to dry to a clear film "barrier". On vertical surfaces, rolling may be preferred over brushing in order to prevent the product from running. Start at the bottom and work up.

Allow up to 1 hour dry time. If the barrier becomes defaced, simply remove the film by peeling or with a water rinse and agitation. Reapply a new barrier once the surface has dried. Note: In exterior application, the barrier may wash away under extended or heavy rains.

### Active Ingredients

| Active Ingredients                         | CAS Number  |
|--|-------------|
| Water.....                                 | 7732-18-5   |
| Vinyl Alcohol Polymers and Copolymers..... | Mixture     |
| Polyglycol ester.....                      | Proprietary |
| Silicic Acid.....                          | 53320-86-8  |
| Triethanolamine.....                       | 102-71-6    |

### Safety


Caution: May cause eye and skin irritation. Keep out of the reach of children.

### DOT Shipping

(ground transportation)

|                       |      |
|-----------------------|------|
| Proper Shipping Name: | None |
| Class:                | None |
| ID Number:            | None |
| Package Group:        | None |

### NFPA Ratings

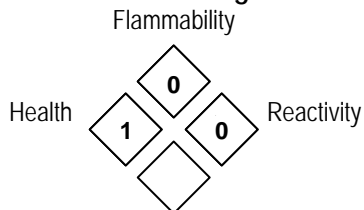

### Quantities

30, 35 & 55 gallon  
5 or 6 gallon  
6 X 1 gallon  
4 X 1 gallon  
12 quarts/case